

Montageanleitung JOSE mit Schiene

- Die Abdeckwinkel (A) von der Deckenschiene abschrauben, die Deckenschiene an der Decke montieren und elektrisch anschließen.
- Die Kabel der Leuchten durch die Höhenversteller (C) fädeln. Hierbei ist die Schlaufe zu berücksichtigen, die zur Höhenverstellung dient. Eine große Schlaufe ermöglicht einen großen Verstellbereich, eine kleine Schlaufe einen kleinen Verstellbereich. Die Kabel auf die gewünschte Länge kürzen.
- Die Kabel durch den Schlitz der Schiene und die Stellringe (B) führen und an den Lüsterklemmen anschließen.
- **WICHTIG!** Die braune Ader an die braun gekennzeichnete und die weiße an die nicht gekennzeichnete Seite der Lüsterklemme anschließen.
- Je nach Anzahl der Leuchten müssen Brücken in den Lüsterklemmen entfernt werden.
- Die Madenschraube im Stellring festziehen, jedoch nicht zu sehr, um das Kabel nicht zu beschädigen.
- Am Schluss die Abdeckwinkel wieder mit den Inbusschrauben befestigen.

Höhenverstellung


Die Höhenverstellung erfolgt durch eine Veränderung der Schlaufe (D)

Assembling Instruction JOSE on track

- Screw off the cover-angle (A) from the ceiling-track, assemble the track to the ceiling and connect it electrically.
- Lead the cable of the lamp through the height-adjuster (C). Hereby please take the loop into consideration, which is used for adjusting the height. A big loop enables a big adjusting range, a small loop enables a small adjusting range. Shorten the cables of the lamps to the desired position.
- Lead the cable through the slit of the track and the adjusting rings (B) and connect it to the connector.
- **Attention:** Connect the brown-col. core to brown-marked side of the connector and the white-col. core to the none-marked side of the connector.
- Depending on the number of installed lamps, some bridges have to be removed from the connectors.
- Fasten the grub-screw to the adjusting ring, but not too tight in order to prevent the cable from damage.
- Finally fix the cover-angle again with the Allen-screws.

Height Adjustment

The height adjustment can be done by altering the loop (D).

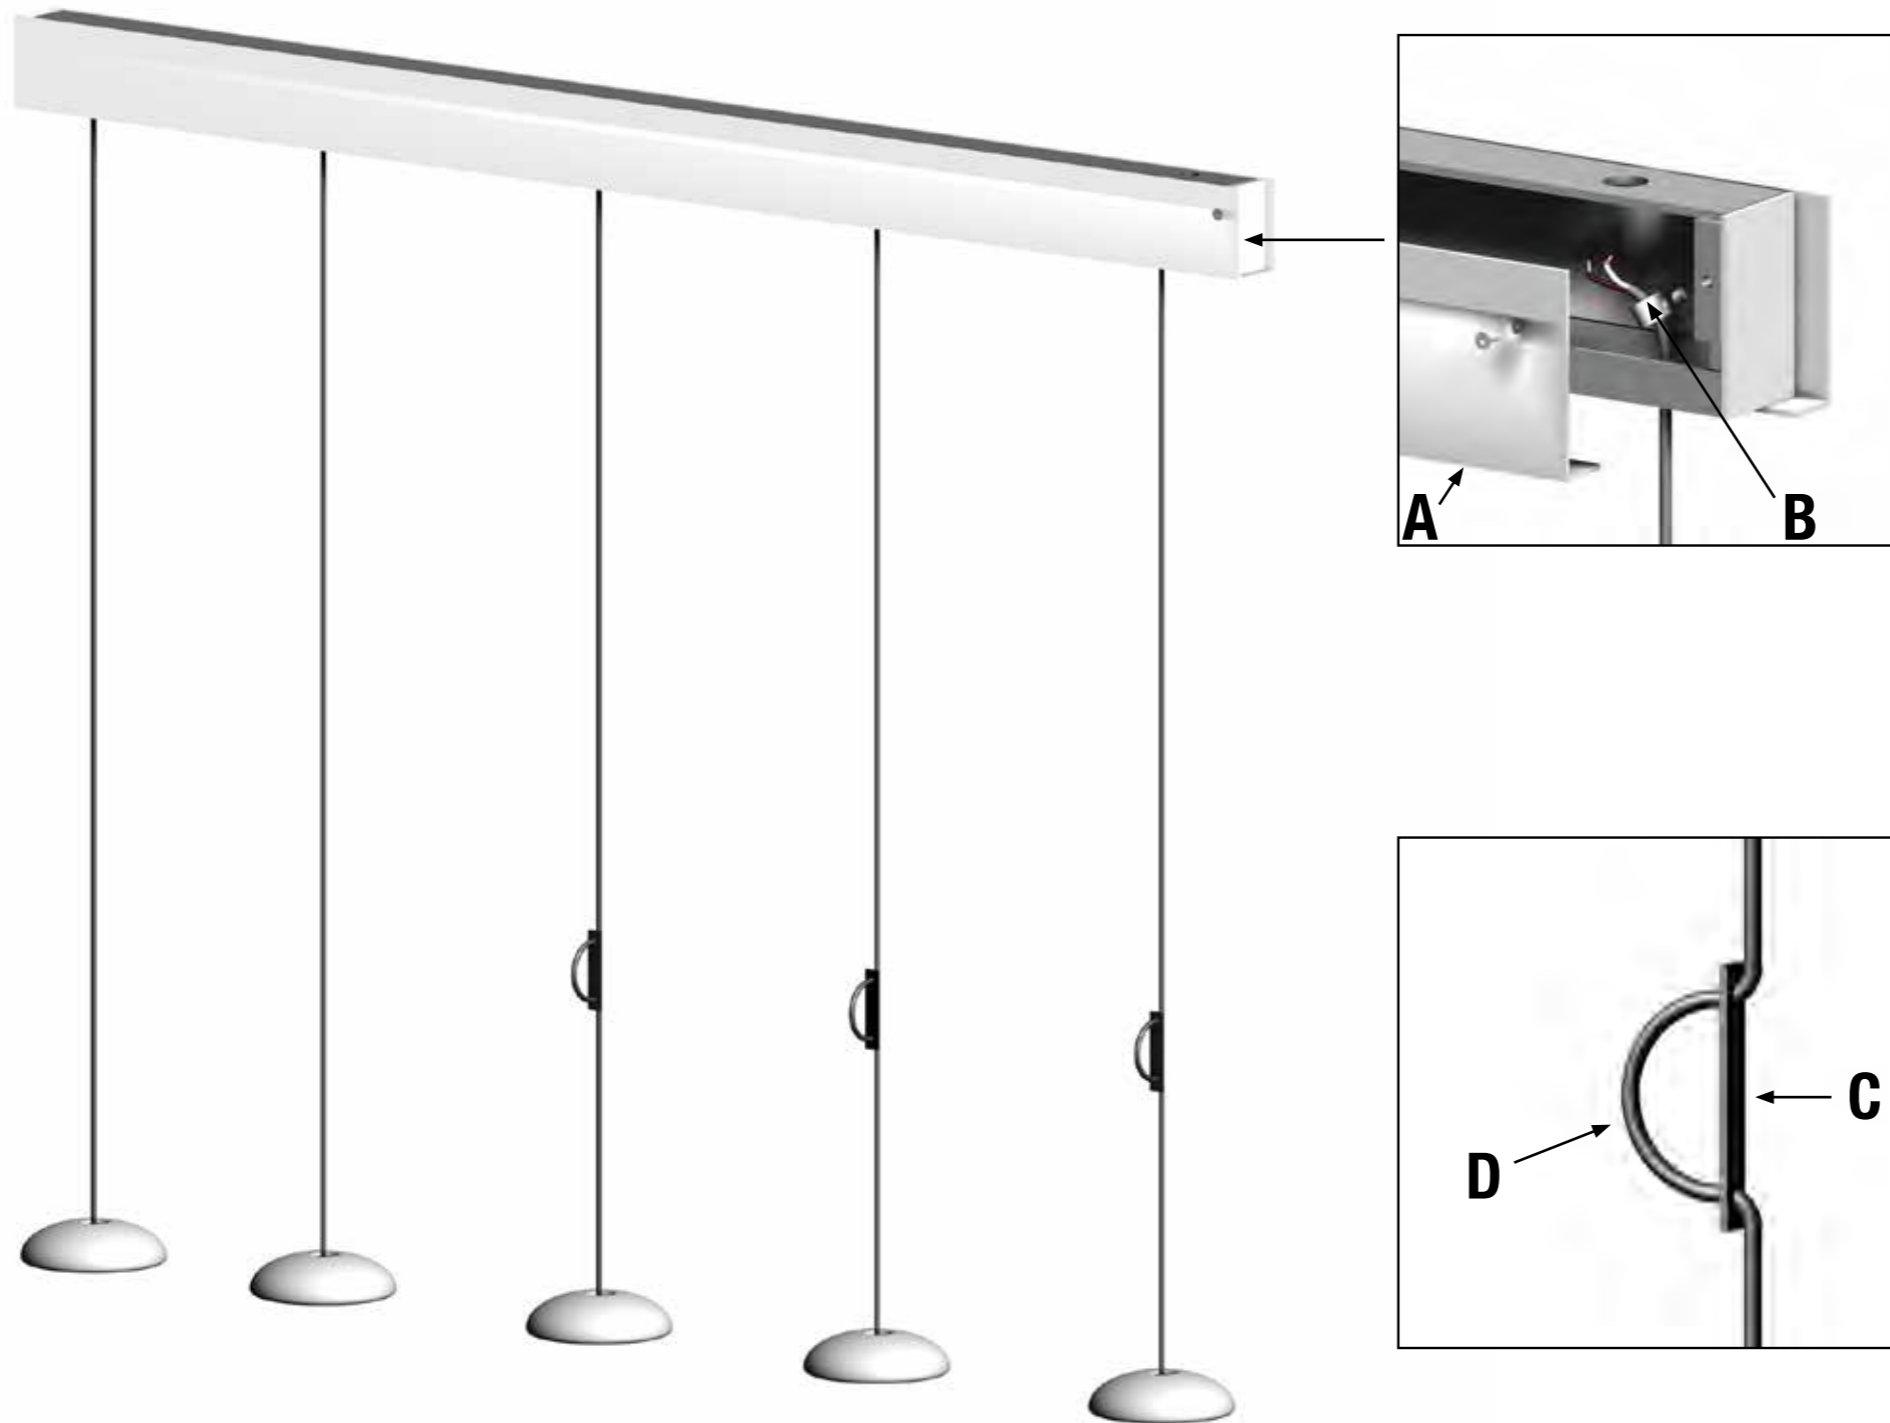

Allgemeine Hinweise

Hängeleuchte 230V
mit Phasen- und Phasenabschnittsdimmer dimmbar
folgende Dimmer können wir empfehlen:
Gira 030700
Jung 225 TDE
Berker 2874
Leuchtmittel: 5 W LED
warmweiß 2700K, 420 lm, Energieeffizienzklasse A+

Montagezubehör:

4 Dübel
4 Schrauben
1 Inbusschlüssel
1 Stelling mit Madenschraube pro Leuchte

1180 mm lange Schiene für 2 - 5 Leuchten
1560 mm lange Schiene für 2 - 5 Leuchten
1940 mm lange Schiene für 2 - 5 Leuchten

Achtung:

Leuchten sind nur vom Fachmann zu installieren!

General Notes

Suspended lamp: 230V / 120V
230V version dimmable with leading edge-
and trailing-edge-dimmers
following dimmers can be recommended:
Gira 030700
Jung 225 TDE
Berker 2874
120V version is not dimmable
Luminants: 5 W LED
warm white 2700K, 420 lm, energy efficiency class A+

Assembling accessories:


4 dowels
4 screws
1 Allen-type-wrench
1 adjusting ring with grub-screw per lamp

1180 mm long track for 2 or 5 lamps
1560 mm long track for 2 or 5 lamps
1940 mm long track for 2 or 5 lamps

Attention:

The lamps have to be installed by an electrician only!

ANTA.

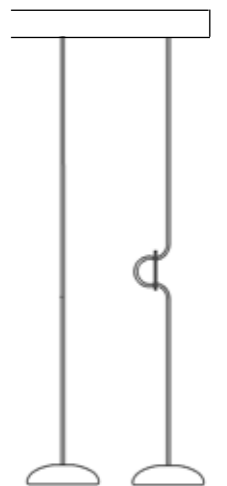

ANTA Leuchten GmbH
www.anta.de
D- 22869 Schenefeld
Stand: Juni 2016

JOSE mit Schiene
JOSE on track
Hängeleuchte
Suspended lamp